


Areas usually in commercial and institutional applications are used by multi users for more than one purpose, and the different applications in these areas require different lighting conditions.

RCA Scene selector using preset control system which adjusts control several lighting channels simultaneously provides the proper scene of lighting for each application of the room. This has dimming, scheduling function and this is suitable for energy management control as well. Thanks to ZigBee® communication, this is configured with lighting fixtures by RCA SENSOR CONNECT App.


[Feature & Benefits]

- Intuitive operation & function
- Aesthetic lighting control with scenes
- More energy saving with integrated scheduling function
- Minimize labor cost with easy installation
 - ZigBee® wireless communication
 - AAA alkaline battery powered (easy replacement)
- Integrated RTC(Real time clock) & back-up battery embedded for durability of scheduling
- 1.84cm slim & sleek design

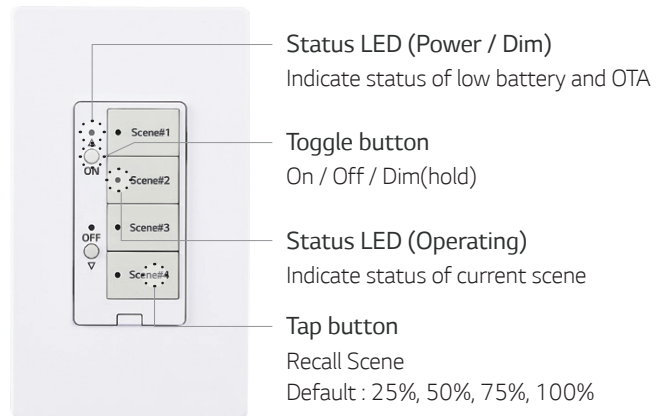

[System Behavior]

- Set scenes using RCA SENSOR CONNECT Commissioning App.
- Sticker option available in a variety of scene name
- Set schedule using RCA SENSOR CONNECT Commissioning App.
- Send message including parameters to the designated lighting group at setting time

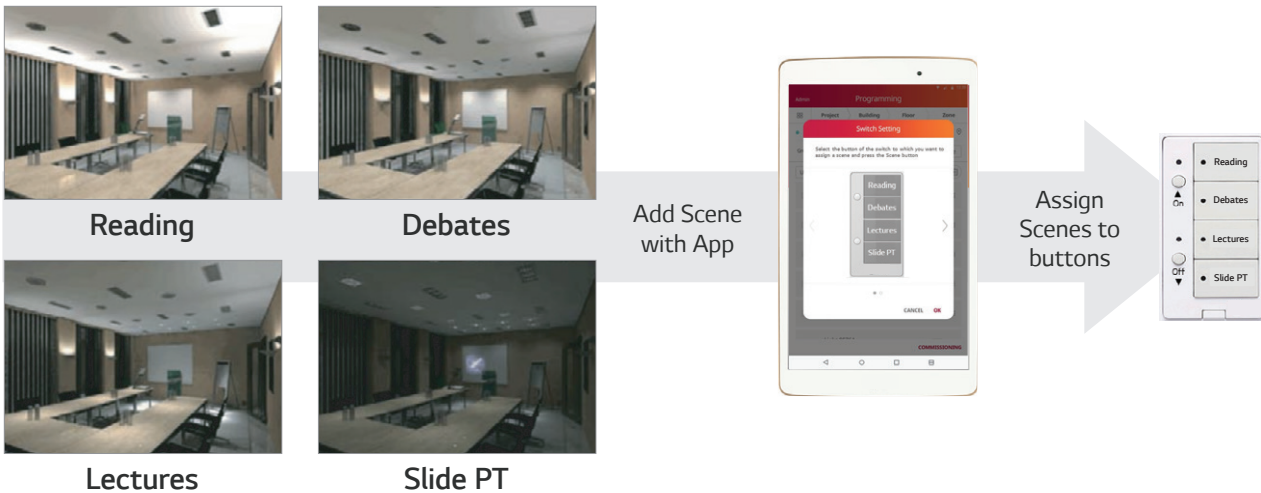

Specifications & Ordering Information

Product type		Model code (US order code)	Input power	Input voltage	Input frequency	Communication range	Dimensions	Weight	Operating temp.	Controls
			W	Vac	MHz	ft (m)	inch (mm)	oz (g)	°F (°C)	-
Scene Selector (Battery type)	1-Group (4buttons)	9SSA2S4B520.AWP01U (LGE-SWITCH-4B-SC)	AAA alkaline	1.5V battery x 4ea	2,405 ~2,480	98.4 (30)	4.84x2.80x0.72 (123.0x71.0x18.4)	3.2 (92) (Without attery)	-4 - 122 (-20 - 50)	ZigBee