


HIGH BAY LIGHTING : 600 SERIES

Specs subject to change

High Bay

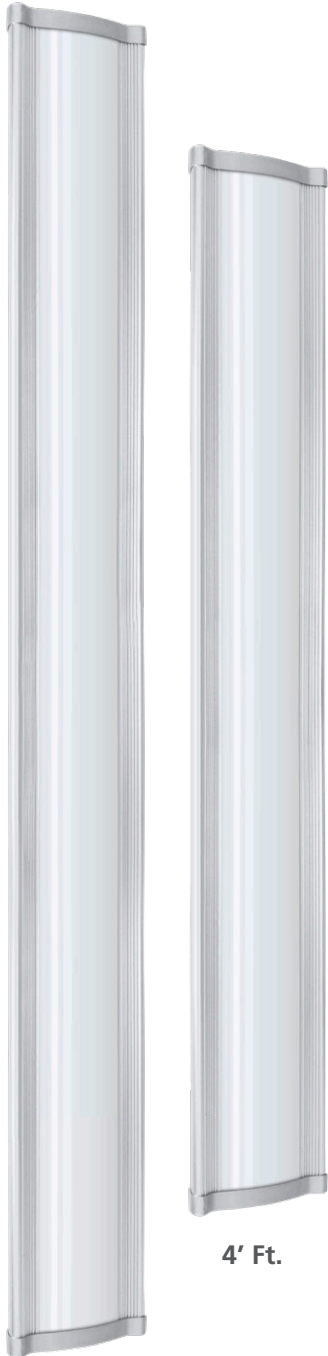

4' Ft.

5' Ft.

Which light is right for you?

Key Features



HB6 High Bay Light

The 600 Series High Bay light casts light in 115°. For best results and maximum light dispersal, HB6 series should be mounted 18' or higher.



Glare Reducing Diffuser


Proprietary diffuser reduces glare by evenly distributing light generated by high output LEDs.




Sealed Fixture

Moisture resistant fixture, prevents dust and insect intrusion.

Light Dispersion Diagram: 115° Coverage

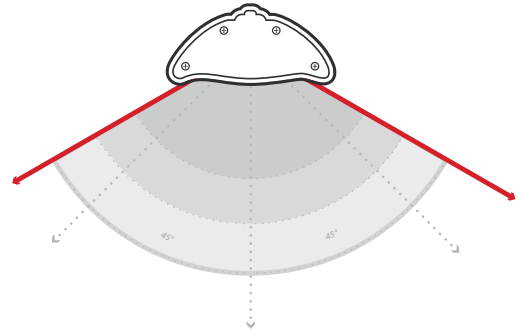

Specifications	HB648160W-50	HB660200W-50
High Bay 600 Series Lights		
Size	4' High Bay	5' High Bay
Watts	160 W	200 W
Efficacy	125 lm/W	125 lm/W
Lumen Output	20,000 lm	25,000 lm
L80 Lifetime	50,000 hr. at L ₈₀	50,000 hr. at L ₈₀
Input Voltage	AC 120 - 277 V	AC 120 - 277 V
Operating Temperature	-4 to 131° F	-4 to 131° F
Length	47.30 in.	59.10 in.
Width	6.60 in.	6.60 in.
Depth	3.10 in.	3.10 in.
Weight	14.0 lbs	19.0 lbs
CRI	≥80	≥80
Color Temperature (CCT)	5000 K	5000 K



UL Listed



RoHS



Lead Free



FCC Certified



Eco-Friendly



Sealed Fixture



Advanced Replacement



DLC 4.2 Listed