


LINEAR LIGHTING : SHL SERIES

Specs subject to change

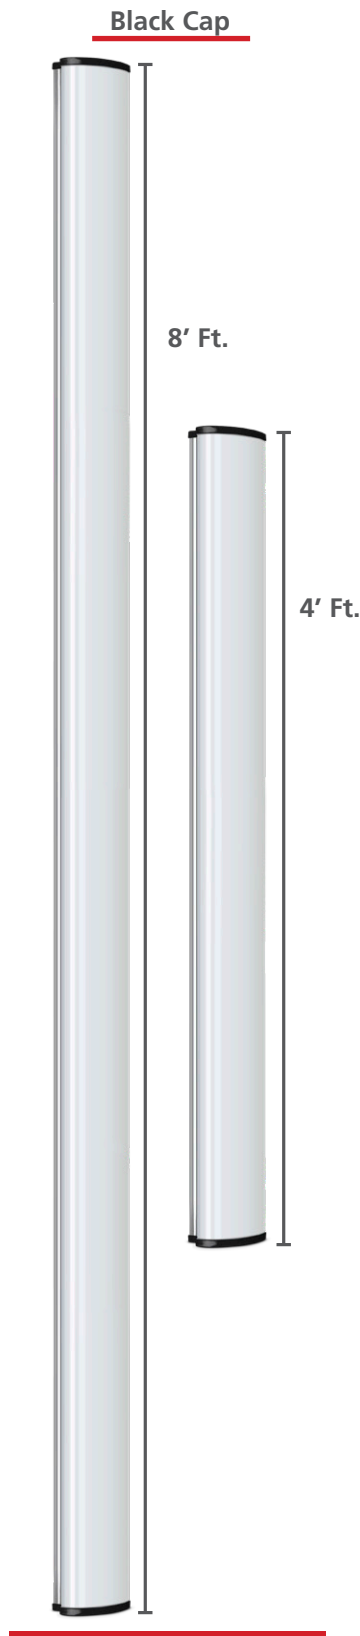

Which light is right for you?

Key Features



SHL High Output Light

The SHL Series High Output Directional light casts light in 180°. Aim the light at the wall, door or bay to light the area & what is directly below it.



Glare Reducing Diffuser


Proprietary diffuser reduces glare by evenly distributing light generated by high output LEDs.



Sealed Fixture

Moisture resistant fixture, prevents dust and insect intrusion.

Light Dispersion Diagram: 180° Coverage

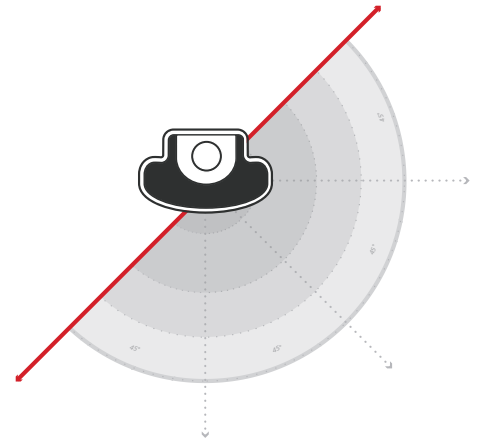

Directional light, covers ground and wall, bay or door.

Specifications	SHL4B2432NU50	SHL8B3432NU50
SHL Series Linear Lights		
Size	4' Linear	8' Linear
Watts	74 W	100 W
Efficacy	120 lm/W	120 lm/W
Lumen Output	8,880 lm	12,000 lm
L80 Lifetime	50,000 hr. at L ₈₀	50,000 hr. at L ₈₀
Input Voltage	AC 120 - 277 V	AC 120 - 277 V
Operating Temperature	14 to 104° F	14 to 104° F
Length	47.24 in.	94.49 in.
Width	5.30 in.	5.30 in.
Depth	3.00 in.	3.00 in.
Weight	6.2 lbs	10.9 lbs
CRI	≥80	≥80
Color Temperature (CCT)	5000 K	5000 K

