



ZIGBEE TO ANALOG TRANSFORMER 1.0

Convert lights to work with RCA Sensor Connect


WORKS WITH: ANY LED LIGHT OR AC LOAD

- | Applied Internal Load Switch to Control AC main On/Off
- | Integrated AC-DC supply for stand-alone operation
- | Support 1 - 10V Dimming
- | 2.4 GHz ZigBee® Transceiver
- | Embedded Antenna for Easy Installation
- | Flexible Platform to accommodate diverse protocols
- | Supports RCA Sensor Connect and Daintree Networks ControlScope
- | DLC, NLC, QPL Listed Lighting Accessory

Add Wireless Control to Any Light or Room

The ZAT is the perfect solution for existing spaces with traditional lighting controls, that are looking to upgrade to a smart lighting setup. The ZAT is easy to wire to an existing LED driver, and can function as a stand-alone light control, a room controller, or a motion sensor for your zigbee network.

See the ZAT wiring diagram

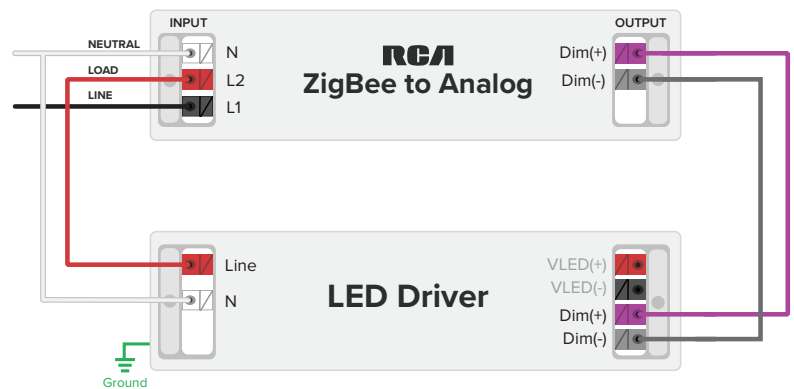

Accessories

| Protective | Multi-Sensors | Wireless Dongles |
|--|--|--|
| <p>RCA-ZJB Junction Box Protective Enclosure Included</p>  | <p>RCA-MULTI-SENSOR Occupancy Sensor Wireless Control</p>  | <p>LGE-DONGLE-VLC Wireless Communication Only</p>  |

SPECIFICATIONS

| | | | |
|------------------------------|-------------------------------|-----------------------|--|
| Model Number | LGE-ZAT | Load Types | Electronic Ballast, General LED Driver |
| Voltage | 120 - 277 Vac | Load | 8 A |
| Frequency | 50/60 Hz | Size | 1.0" x 1.28" x 9.06" |
| Dimming | 1 - 10 Vdc | Weight | 0.4 oz |
| Operating Temperature | -4° to 158° F (-22° to 70° C) | Certifications | DLC, NLC, QPL Listed |