

LINEAR LIGHTING : ST SERIES with Sensor Connect

Specs subject to change

Ask your sales rep about Sensor Connect


Key Features



ST Linear Light

The ST Linear Light casts light in 120° directly below the light, ideal for store and aisle lighting.

Light Dispersion Diagram: 120° Coverage

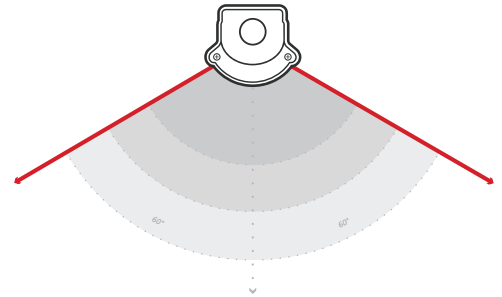

Sensor Connect Compatible

Wireless lighting control ready, ZigBee® Sensor embedded for occupancy sensing and daylight harvesting.



Glare Reducing Diffuser

Proprietary diffuser reduces glare by evenly distributing light generated by high output LEDs.



Specifications	ST4B3208DU50	ST8B3215DU50
ST Series Linear Lights		
Size	4' Linear	8' Linear
Watts	27 W	56 W
Efficacy	122.2 lm/W	120.7 lm/W
Lumen Output	3,300 lm	6,760 lm
L80 Lifetime	50,000 hr. at L ₈₀	50,000 hr. at L ₈₀
Input Voltage	AC 120 - 277 V	AC 120 - 277 V
Operating Temperature	14 to 104° F	14 to 104° F
Length	47.24 in.	94.49 in.
Width	3.10 in.	3.10 in.
Depth	2.55 in.	2.55 in.
Weight	3.09 lbs	5.29 lbs
CRI	≥85	≥85
Color Temperature (CCT)	5000 K	5000 K



ZigBee® Compatible

