



ZIGBEE TO ANALOG TRANSFORMER 2.0

Convert dumb lights to work with RCA Sensor Connect

WORKS WITH: ANY LED LIGHT OR AC LOAD


Add your lights to the RCA Smart Lighting System with the ZAT. This zigbee to analog transformer adds zigbee wireless compatibility to any LED light, or AC load. Mount the ZAT to a 1/2" knockout in any standard junction box, and plug in one of RCAs multi-sensors or wireless dongles to activate your lights.

Add Zigbee Wireless Compatibility to any LED Light or AC Load

High Max Load (8A); Enables control of multiple lights

Supports RCA Sensor Connect and Daintree Networks ControlScope

No enclosure needed, mounts to 1/2" knockout in a standard jbox

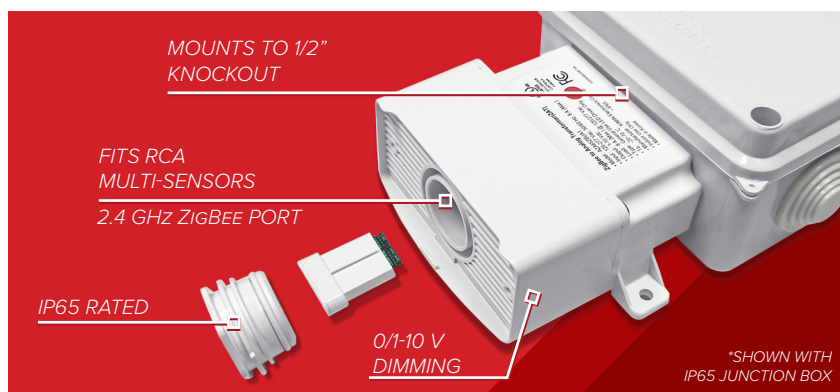

Add Wireless Control to Any Light or Room

The ZAT is the perfect solution for existing spaces with traditional lighting controls, that are looking to upgrade to a smart lighting setup. The ZAT easily mounts to a 1/2" knockout in any standard junction box, and can function as a stand-alone light control, a room controller, or a motion sensor for your zigbee network.

Recommended Accessories

Multi-Sensors

RCA-MULTI-SENSOR
Occupancy Sensor
Wireless Control



LGE-HB-OSZ-IP65-V
IP65 Occupancy Sensor
Wireless Control



Wireless Dongles

LGE-DONGLE-VLC
Wireless
Communication Only



SPECIFICATIONS

Model Number	RCA-ZAT2	Load Types	Electronic Ballast, General LED Driver
Product Type	ZigBee to Analog Transformer	Load Rating	8 A
Power	3.0 (Max)	Size	3.78" x 4.17" x 1.58"
Voltage	120 - 277 Vac	Weight	5.15 Oz
Frequency	50/60 Hz	Operating Temperature	-4° to 158° F (-22° to 70° C)
Dimming	0/1 - 10 Vdc	Certifications	DLC, NLC, QPL Listed

Sample Applications for the ZAT 2.0

Add your lights to the RCA Smart Lighting System with the ZAT. This zigbee to analog transformer adds zigbee wireless compatibility to any LED light, or AC load. Mount the ZAT to a 1/2" knockout in any standard junction box, and plug in one of RCAs multi-sensors or wireless dongles to activate your lights.

Traditional Lighting

Convert any existing light to work with Sensor Connect


Turn any light in your building or office into a smart, controllable light using our ZAT 2.0. When paired with our multi-sensors or radio dongles, you can begin building out your Sensor Connect Lighting Network.



Multiple Light Control

Use one ZAT 2.0 to control a string of lights.


Easily connect up to 10 fixtures to one ZAT 2.0 unit, and you have the wireless ability to dim and switch an entire area's lighting. It's perfect for unifying different fixtures into a whole, and offers the ultimate in control over your space.

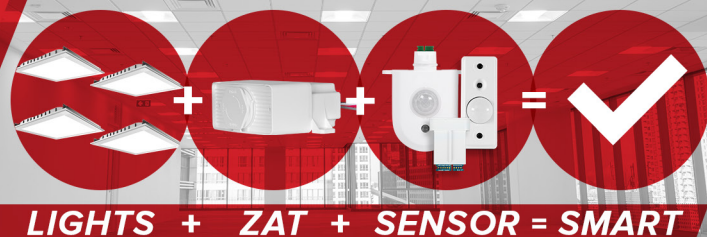

Highbay

Add smart controls to your warehouse

ZAT 2.0 allows for multiple high-bays to be connected to a single unit, allowing for areas to be group controlled with either motion sensor or wireless switch. The wireless dimming capabilities allow for flexibility in your lighting management scheme.

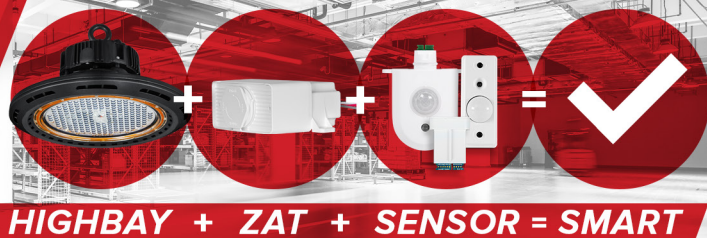

Learn more about Sensor Connect Features Online.

Learn about RCA Sensor Connect features, commissioning, advanced setup and more on our YouTube Page.

YouTube

