

FLAT PANEL LED LIGHTING

Specs subject to change

Available in 4000K & 5000K Color Temperatures

Key Features



Sealed Light

RCA Flat panel lights are factory sealed to prevent debris, dust and other foreign materials from getting into the fixture, and damaging the LED Panel.



Glare Reducing Diffuser


Proprietary diffuser reduces glare by evenly distributing light generated by high output LEDs.



Dimmable

A 0-10 V Dimmer light switch can be used to adjust brightness of the fixture.

Light Dispersion Diagram: 114° Coverage

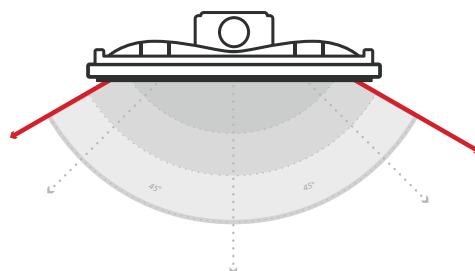

2' x 2' Flat Panel LED



1' x 4' Flat Panel LED



2' x 4' Flat Panel LED

Specifications	R30T66U2DU		R3TR3U2DU		R40TR6U2DU	
Flat Panel LED Lighting						
Size	2' x 2'		1' x 4'		2' x 4'	
Watts	30 W		30 W		40 W	
Efficacy	110 lm/W	113 lm/W	110 lm/W	113 lm/W	124 lm/W	125 lm/W
Lumen Output	3,300 lm	3,390 lm	3,300 lm	3,390 lm	5,000 lm	5,021 lm
L80 Lifetime	50,000 hr. at L ₈₀		50,000 hr. at L ₈₀		50,000 hr. at L ₈₀	
Input Voltage	AC 120 - 277 V		AC 120 - 277 V		AC 120 - 277 V	
Operating Temperature	14 to 104° F		14 to 104° F		14 to 104° F	
Length	23.62 in.		47.24 in.		47.84 in.	
Width	23.62 in.		11.81 in.		23.70 in.	
Depth	3.93 in.		2.70 in.		3.20 in.	
Weight	8.6 lbs		8.42 lbs		16.53 lbs	
CRI	≥80		≥80		≥80	
Color Temperature (CCT)	4000 K	5000 K	4000 K	5000 K	4000 K	5000 K



UL Listed



RoHS



Lead Free



FCC Certified



Eco-Friendly



Sealed Fixture



Advanced Replacement



DLC 4.2 Listed