


LINEAR LIGHTING : SH SERIES

Specs subject to change

Brown Cap

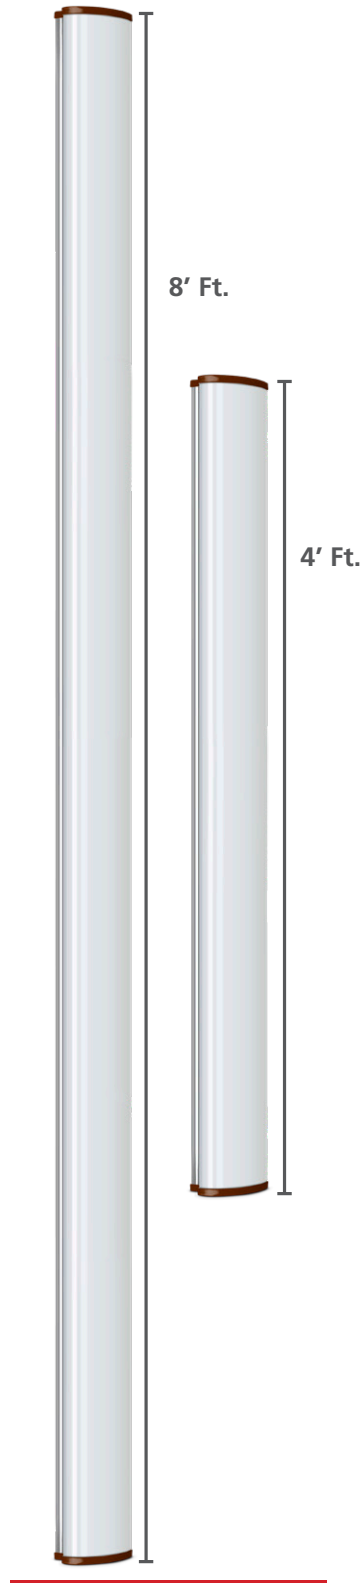

Which light is right for you?

Key Features



SH High Output Light

The SH Series High Output light casts light in 275°, covering shipping & sorting areas.



Glare Reducing Diffuser


Proprietary diffuser reduces glare by evenly distributing light generated by high output LEDs.



Sealed Fixture

Moisture resistant fixture, prevents dust and insect intrusion.

Light Dispersion Diagram: 275° Coverage

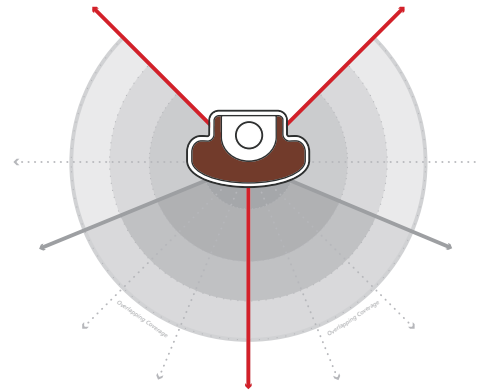

Spreads light on all walls.

Specifications	SH4B3432NU50	SH8B2465NU50
SH Series Linear Lights		
Size	4' Linear	8' Linear
Watts	120 W	145 W
Efficacy	130 lm/W	123 lm/W
Lumen Output	15,600 lm	17,835 lm
L80 Lifetime	50,000 hr. at L ₈₀	50,000 hr. at L ₈₀
Input Voltage	AC 120 - 277 V	AC 120 - 277 V
Operating Temperature	14 to 104° F	14 to 104° F
Length	47.24 in.	94.49 in.
Width	5.30 in.	5.30 in.
Depth	3.00 in.	3.00 in.
Weight	7.8 lbs	12.3 lbs
CRI	≥80	≥80
Color Temperature (CCT)	5000 K	5000 K

