



3500 K, 4000 K & 5000 K Selectable CCT

SELECTABLE CCT LED PANEL

Selectable white dynamic lighting with adjustable power

APPLICATIONS: INDOOR, OFFICES, RESTAURANTS, SCHOOLS, HOSPITALS

Selectable Flat Panels usher in a new generation of controllable Lay-In Lights.

Selectable White, (Variable CCT) enhances any areas lighting design, by offering multiple color temperature and power usage levels that are flexible to individual needs and preferences.


Field-Adjustable Light output and Selectable White.

9-in-1 saves shelf space and increases product availability.

0-10V Control Options provide even more fine tuning.

High Efficiency LEDs and Drivers offer up to 140 lm/W.

SELECTABLE CCT LED PANEL Performance Summary




110°
Beam Angle

Up to
7,000 lm

Up to
140 lm/w

**0 - 10 V
Dimming
Capable**

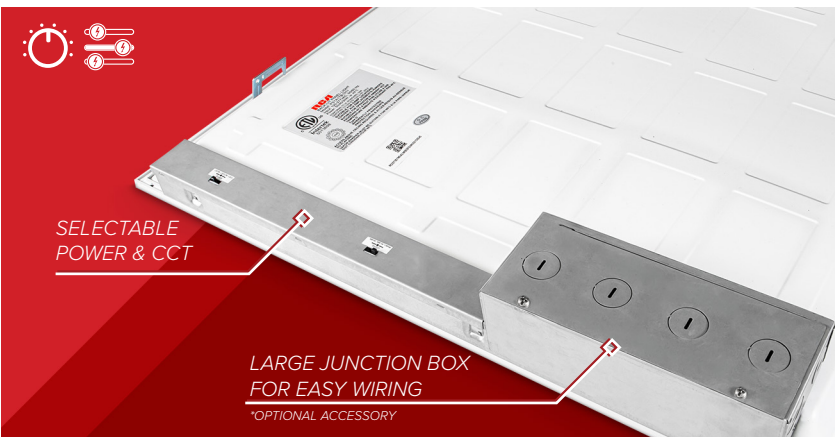

Easy to wire & easier to adjust to your needs..

No extra wiring is required for color or brightness tuning. Other Tunable Lighting systems can require DMX cables, color-mixing interfaces, multi-channel drivers, etc, that can take time to install. RCA Tunable White Lights feature an easily accessible dip-switch on the driver for quick adjustments. Need more space for wiring? Add on the large junction box with 8 knockouts for extra space to add connections, daisy chain lights, and more. Customize this light to fit your preferences.

Ordering Information

Example: PS1A1TB1041


Product	Size	Model Number	Watts	Lumens	CCT	Beam	Driver	Options	
Selectable LED Panel Selectable CCT & Power Flat Panel	2' x 4'	PS1A1TB1011	30 W	4,200 lm	3500 K 4000 K 5000 K	110°	Universal AC 120- 277 V 50 - 60 Hz	P22SM-KIT Surface Mount Kit 2' x 2' EM25W Emergency Pack 25W / 90 Min	
			40 W	5,600 lm					P24SM-KIT Surface Mount Kit 2' x 4' PS1-JBE Large Junction Box All Models
			50 W	7,000 lm					
	2' x 2'	PS1A1TB1041	20 W	2,500 lm	3500 K 4000 K 5000 K	110°	Universal AC 120- 277 V 50 - 60 Hz		
			30 W	3,750 lm					
			40 W	5,000 lm					

SELECTABLE CCT LED PANEL


Specs subject to change

Dimensions & Parts


Dimensions : 2' x 2'

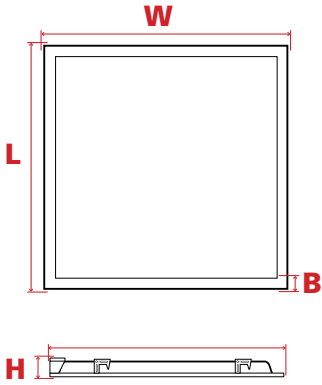

Dimensions : 2' x 4'

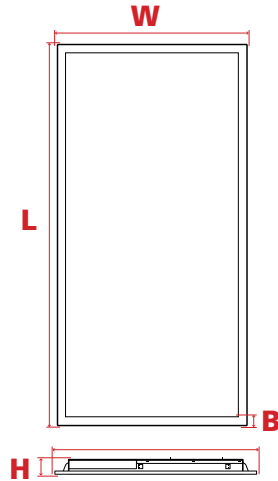

Size	Width (W)	Length (L)	Height (H)	Bezel (B)	Weight
2' x 2'	23.75"	23.75"	1.625"	1"	7.9 lbs
2' x 4'	23.75"	46.7"	1.625"	1"	12.6 lbs



Pre-Installed Earthquake Clips

- Pre-Installed to assist with installation
- Secures your fixture in case of seismic activity
- Complies with NEC Article 410-16 Means of Support

Options



Battery Backup

EM25W
Emergency Pack
25W / 90 Min

Easy Wiring Junction Box

PS1-JBE
Large Junction Box
All Models

Mounting Kits | Field-Installable

P225M-KIT
Surface Mount Kit
2' x 2'

P245M-KIT
Surface Mount Kit
2' x 4'


Lighting Specifications

Size	2' x 2'	2' x 4'
Max Delivered Lumens	5,000 lm	7,000 lm
Power	Up to 40 W	Up to 50 W
Efficacy	125 Lumens Per Watt	140 Lumens Per Watt
Color Temperature	3000 K / 4000 K / 5000 K	
Beam Angle	110°	
Input Voltage	AC 120 - 277V, 50 - 60 Hz	
CRI	86 +	
L80 Lifetime	50,000 Hours at L80	
Controls	0 - 10 V	

DLC Product ID Reference Chart

US Order Code	DLC Prod. ID	US Order Code	DLC Prod. ID
PS1A1TB1011	PLAQ7SVQ2PJV	PS1A1TB1041	PLHJRIQE430P

Mounting Options

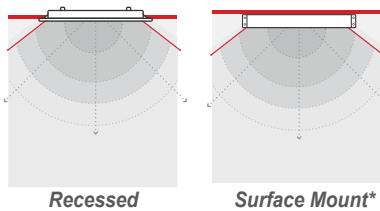

*Requires additional parts

Certifications & Warranty

cULus Listed, UL 1598 Damp Location Use, DLC 5.1 Premium Listed, RoHS Compliant, Meets FCC Standards, Covered by RCA Commercial 5 Year Advanced Replacement Warranty.