

# ZigBee TO ANALOGUE TRANSFORMER (1-10V)

Specs subject to change




## ZigBee to Analogue



### Features

- | Applied Internal Load Switch to Control AC main On/Off
- | Integrated AC-DC supply for stand-alone operation
- | Supports 1 - 10V Dimming
- | 2.4 GHz ZigBee® Transceiver
- | Embedded Antenna for easy installation
- | Flexible platform to accommodate diverse protocols
- | Supports RCA Sensor Connect and Daintree Networks ControlScope
- | Only mounted inside fixture or enclosure

### Wiring Diagram

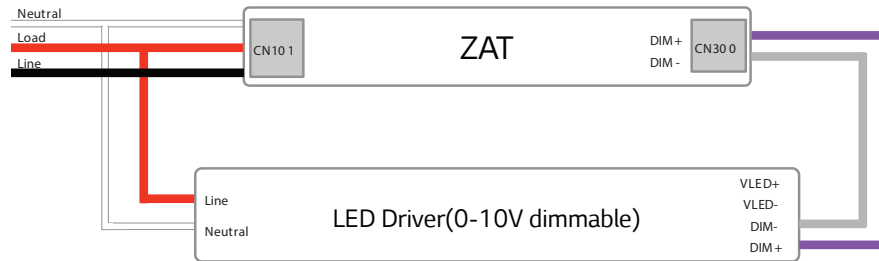

### Specifications & Ordering Information

Example: LGE-MULTI-SENSOR

Product Type	Model Number	Power	Voltage	Freq.	Load	Load Types	Dims	Weight	Operating Temp	Dimming
		W	Vac	Hz	A	in.		oz		Vdc
ZigBee to Analogue (1-10V) Transformer	LGE-ZAT	Max 3.0	120 - 277 Vac	50/60	Max 1.5	Electronic Ballast, General LED Driver	1.0" x 1.28" x 9.06"	0.4 oz	-4° - 158°F	1 - 10

Product Type	Model Number	Power	Voltage	Frequency	IP	Dimensions	Weight	Operating Temp	Controls
		W	Vdc	Mhz		in.	oz		
Smart Multi Sensor	LGE-MULTI-SENSOR	0.2 W	3.3 Vdc	2405 ~ 2480 Mhz	20	Sensor: 0.8 x 2 x 0.7 Dongle: 0.9 x 1 x 0.3 Cable: ø0.16 x 31.5	0.4 oz	-4° - 122°F	ZigBee
Wireless Communication Module VLC	LGE-DONGLE-VLC	0.2 W	3.3 Vdc	2405 ~ 2480 Mhz		0.8" x 2" x 0.7"	0.2 oz		ZigBee